

PINNACLE

Water Treatment

5800 XTR2 Touchscreen Water Softener with AccuSense Technology

When water quality matters, Pinnacle residential water softeners and filtration systems deliver. Featuring Pentair's patented Fleck technology and backed by superior after-sales support, Pinnacle systems are designed with Canadian families in mind.

Enhance the quality of your water with the Fleck 5800XTR2 Touchscreen Water Softener with AccuSense Technology.

- Silky soft skin & hair after showering
- Clothes are brighter, softer & last longer
- Glasses & dishware are spot free
- Use 50% less detergent, fabric softeners, soap, shampoo & personal moisturizers
- Add years of life to water heaters, dishwashers & washing machines

**Water treatment solutions engineered
for your unique water needs.**




Fleck 5800XTR2 AccuSense Residential Water Softener

FEATURES

- AccuSense Technology thrives when water hardness fluctuates
- 18-karat gold-plated sensor probes “Never Sleep” and continuously monitor resin performance reducing unnecessary regenerations
- Real-time water hardness data combined with the Touchscreen XTR2 controller provides a “Set It and Forget It” approach
- Adaptive system adjusts to changes in the customers water use; no need for reserves and re-programming
- Soft water refill for cleaner brine tank, less maintenance and better regeneration performance

System includes: Control valve featuring XTR2 touchscreen, 18- karat gold-plated sensor probes, ¾" FPT stainless bypass and Pentair poly glass media vessel with 1" ABS internal distribution.

Softener includes: High quality structural mineral and brine tanks. Brine tank c/w salt shelf and Fleck 2310 brine safety float assembly. Uses maximum efficiency Purolite SSTC-6000 cation exchange resin.

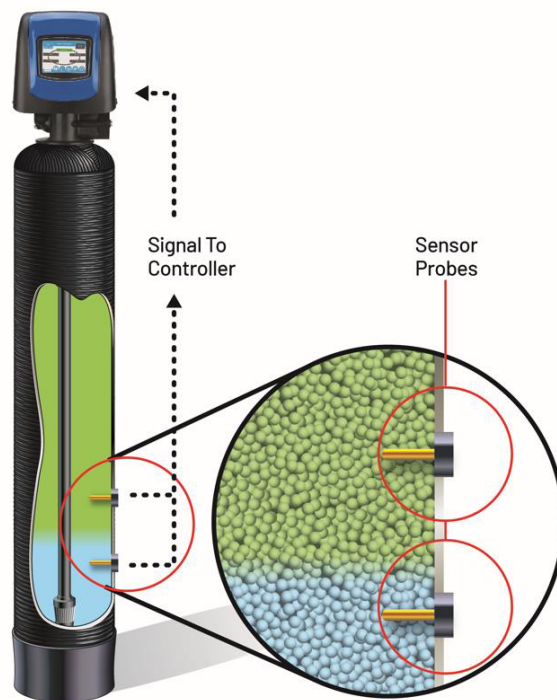

Specifications

Model Number	Resin (CuFt)	Tank Sizes		Unit Cap		Flow Rates		BKW (GPM)	Salt Req. (lbs.)	Weight (lbs.)
		Resin Tank	Brine Tank	Min	Max	Service	Peak			
24KSST58XTR2AS	0.75	8" x 44"	14" x 34"	18K	24K	4	6	1.5	5.25	85
30KSST58XTR2AS	1.0	9" x 48"	14" x 34"	24K	30K	5	8	2.0	7	95
45KSST58XTR2AS	1.5	10" x 54"	14" x 34"	36K	45K	7.5	12	2.4	10.5	125
60KSST58XTR2AS	2	12" x 48"	14" x 34"	48K	60K	10	16	3	14	170

Capacities are based on resin manufacturer's data • Units are set to the factory minimum salt setting • Use minimum capacity when sizing • Flow rates are in U.S. Gallons/minute • Sizes and space requirements are in inches.

